

## DUO L 50 PROFESSIONAL

3/4" frost-proof water tap made from glass peened stainless steel. This water tap is particularly suitable for construction sites, industrial plants, washing-down areas, farms or other places with a need for reliable water supply all year round. The water tap is supplied complete with well.

The water tap is fitted with a self-emptying 3-way sliding valve, ensuring that the tap remains frost-proof, even at hard freezing temperatures. The seals can be replaced without digging up the well. Unscrew the spindle housing from the top of the pipe stand, then pull up the spindle and replace the O-rings.

Is the product to be placed in an area with a high environmental impact, including sea fog, it is recommended to choose a special design i.e. an electro polished surface.

### PRODUCT

Designation: 3/4" frost-proof water tap for outdoor installation  
Tapping: 3/4" nipple pipe thread  
Connection: 3/4" nipple pipe thread

### INSTALLATION DIMENSIONS

Tapping height: 495 mm  
Tapping depth: 155 mm  
Pipe stand height: 795 mm  
Height of handle: 715 mm  
Height of spout: 655 mm

### PRODUCT DIMENSIONS


Overall height: 1,695 mm  
Overall width: 260 mm  
Well: D160 x 900 mm

### SHIPPING

Dimensions, H-W-D: 1,840 x 200 x 300 mm  
Weight: 10 kg complete with well

### VALVE

FROSTLINE® self-emptying sliding valve  
Capacity: 37-45 l/min. at 2-4 bar  
O-rings: 8 x 3 mm NBR – shore 70

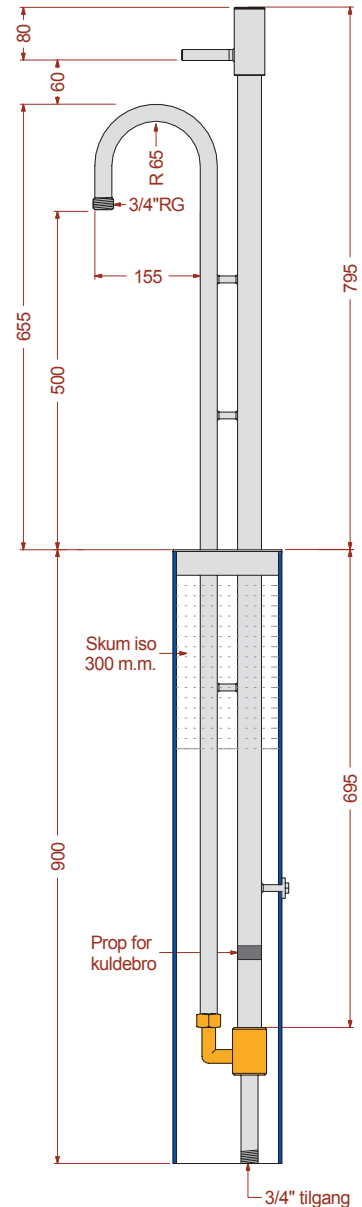

MODEL		
F152	74.34.80.244	Duo L 50 Professional
OPTIONAL		
F520	74.34.89.926	Blocking tube L - stainless steel

VA approval No.: ETA – VA 1.51/19066

### OPERATION OF THE VALVE

The water tap is provided with a 3-way self-emptying sliding valve. When the water tap is not in use, the valve and riser pipe are emptied of water that might otherwise freeze. The water tap and thus the valve and riser pipe are frost-proof as long as the water supply line for the tap does not freeze.

# FROSTLINE®



DUO L 50 PROFESSIONAL

