

PRESTO®
loves water


DL 400

Guaranteed savings,
enhanced hygiene, assured
comfort and certified
endurance

DL 400 SE®
Mechanical self-closing shower

DL 400 E TOUCH®
Sensitive self-closing shower

DL 400 E SENSOR
Sensor touchless shower

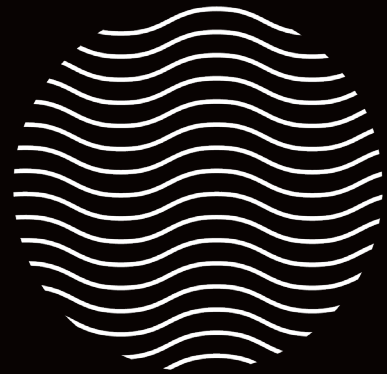

New electronic shower panel
DL 400 E SENSOR

FRENCH TAPWARE
SENSOR | TIMED-FLOW | SENSITIVE



Modern and slim design

Non visible fixings, slim panel and anti-fingerprint finish






Robustness and reliability

- Product designed and tested for intensive use: 500 000 cycles minimum
- Salt spray resistant for outdoor use

DL 400 SE® anti-blocking system

Mechanical self-closing shower

- 27400 - Straight stop valve - Ø 1/2" 
- 27402 - Angled stop valve - Ø 1/2" 
- 27430 - Without stop valve - Ø 3/4" 

DL 400 E SENSOR

Sensor touchless shower

- 27470 - Without stop valve - Ø 3/4" - Battery
- 27471 - Straight stop valve - Ø 1/2" - Battery
- 27472 - Angled stop valve - Ø 1/2" - Battery
- 27474 - Without stop valve - Ø 3/4" - Power supply
- 27475 - Straight stop valve - Ø 1/2" - Power supply
- 27476 - Angled stop valve - Ø 1/2" - Power supply

DL 400 E TOUCH®

Sensitive self-closing shower

- 27432 - Straight stop valve - Ø 1/2"
- 27434 - Angled stop valve - Ø 1/2"
- 27435 - Without stop valve - Ø 3/4"

DL 400 SE® Legionella version

Mechanical self-closing shower in connection with a remote triggering box

- 27424 - Straight stop valve - Ø 1/2" 
- 27426 - Angled stop valve - Ø 1/2" 

SPECIFICATIONS

- Single tap for pre-mixed or cold water
- Automatic stop after 30 sec.
- Flow rate: 6 or 8 l/min
- Water inlet: G1/2" with stop valve or G3/4" without stop valve
- Connection from the top with straight stop valve, or from the back with angled stop valve

BENEFITS

DL 400 SE® anti-blocking Soft push and anti-vandalism

- Ergonomic button suitable for elderly and disabled people
- Patented anti-blocking system S® to avoid continuous flow
- Also available in Legionella version

DL 400 E TOUCH® Security and comfort

- Electronic sensitive Start/Stop function suitable for disabled people
- Flow duration, automatic rinsing and thermal shocks can be set directly by the TOUCH button

DL 400 E SENSOR Maximized savings and hygiene

- Electronic touchless Start/Stop function suitable for elderly and disabled people
- Flow duration, automatic rinsing and usage data can be set or downloaded via PRESTOCOM tool

PREVENTING LEGIONELLA

The automatic rinsing of the showers and the triggering of thermal shocks prevent the stagnation of water in the piping networks and prevent bacterial proliferation (Legionella, Pseudomonas...)



Unparalleled comfort

Adjustable shower head with pleasant and enveloping rain jet, suitable for all body types



Easy maintenance

- 42 anti-limescale spikes in thermolast delaying the fixation of limestone and cleanable with a swipe of a finger
- Light panel making the installation easy



THE PRESTO TIP! Water savings... but not only that!

Only one DL 400 E TOUCH® or DL 400 E SENSOR is enough!

If you have several DL 400 SE® installed in series, only one single DL 400 E TOUCH® or DL 400 E SENSOR installed at the end of the network will allow you to purge your entire water network!

THEY TRUST THE DL 400!

Leisureworld Cork – Irlande
DOTO swimming pool - Holland
Virgin Fitness Centers - Denmark
Limerick University - Ireland
Arena de Hoquet de Boisbriand - Canada
Silver Fern Backpackers – New Zealand
DeepSpot swimming pool - Poland
Südkurier newspaper office - Germany
Léo Lagrange sports center - France

DISCOVER OUR ELECTRONIC SHOWER PANELS PRESTOTEM® 2 SENSOR!

Single taps for pre-mixed or cold water

88880 - Prestotem® 2 Sensor - Battery

88882 - Prestotem® 2 Sensor - Power supply

Thermostatic mixer taps

88884 - Prestotem® 2 Sensor - Battery

88886 - Prestotem® 2 Sensor - Power supply

With fixed shower head

COMFORT AND ANTI-SCALDING SECURITY

In order to guarantee a constant temperature and to avoid any risk of burn, equip your sanitary system with a **safety thermostatic regulator**. In case of cold water shut-off, hot water supply is shut-off immediately.



29002
Internal temperature limiter
G 3/4" - from 30 to 65°C - 57 l/min at 3 bar




29003
Temperature safety limiter 38°C
G 3/4" - from 20 to 50°C - 30 l/min at 3 bar



29006
Internal temperature limiter
G 1/2" - from 20 to 50°C - 43 l/min at 3 bar



29007
Internal temperature limiter
G 3/4" - from 20 to 50°C - 47 l/min at 3 bar

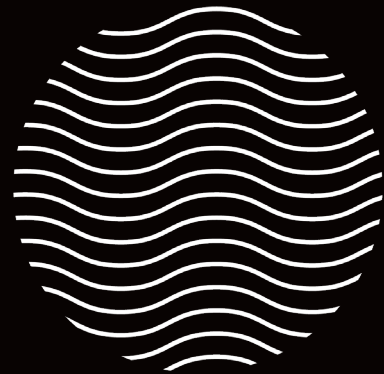

PRESTO



LES ROBINETS PRESTO S.A.

7, RUE RACINE
92542 MONTROUGE CEDEX – FRANCE

Tel.: +33 (0)1 46 12 34 56 | Fax: +33 (0)1 47 35 69 82

Email: adv.export@presto.fr

www.presto.fr | www.presto-group.com | www.prestobim.com

PRESTO MIDDLE EAST / DMCC

GABC 10TH FLOOR, SWISS TOWER, CLUSTER Y
JLT PO BOX 643718 DUBAI
UNITED ARAB EMIRATES

Tel.: +971 52 79 32409

Email: d.heyberger@presto.fr

www.presto-group.com | www.prestobim.com

