

FROSTLINE®



CITYPOST G200



DRINKING FOUNTAIN - OUTDOOR

Outdoor drinking fountain produced in cast iron and brass. The drinking fountain is designed with focus on use in public areas. A design without bowl makes the fountain less sensitive to vandalism. The open design provides an easy access to drink direct from the fountain or to fill a drinking bottle. Wheelchair users can also access the fountain, due to the open design.

There are no operating costs other than water. No electricity etc. The fountain is provided with a self-closing button, that turns off the water when released. The fountain is fitted with a self-emptying 3-way sliding valve, and when connected to the main water supply, the fountain will provide cool water all year round.

The drinking fountain can be delivered in all RAL-colours.

PRODUCT

Designation: Drinking fountain - 1/2" - 1170mm high, supplied complete with drain well
 Tapping: 6mm jet nozzle
 Connecting: 1/2" nipple pipe thread

INSTALLATION DIMENSIONS

Tapping height: 1170mm
 Tapping depth: 180mm
 Total stand height: 1250mm
 Button height: 1000mm

PRODUCT DIMENSIONS


Total stand height: 1250mm
 Total width: 300mm
 Well: D255 x 900mm

SHIPPING

H-W-D: 2200 x 300 x 250mm
 Weight: 40kg total with well

VALVE

FROSTLINE® self-emptying sliding valve
 Capacity: 10 l/min. at 2-4 bar
 O-rings: 1 pcs. D9x1,5 90sh, 2 pcs. D6x1,5 90sh

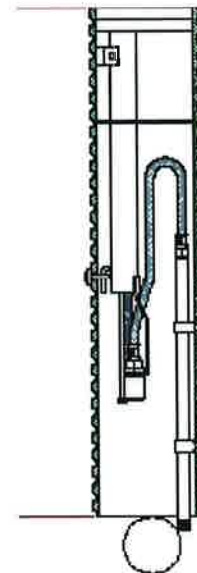

VA. approval No.: ETA - VA 1.51/19066

OPERATION OF THE VALVE

The fountain is provided with a 3-way self-emptying sliding valve. When the fountain is not in use, the valve and riser pipe are emptied of water that might otherwise freeze. The fountain and thus the valve and riser pipe are frost-proof as long as the water supply line for the tap does not freeze.



MODEL	
G200	Citypost drinking fountain
OPTIONAL	
	Manhole cover