

Vertical, wall mounted fumé SAN / white ABS
Código: DJ0010F
General description

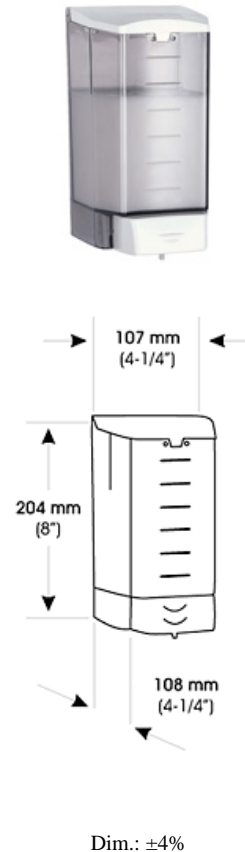
- Liquid soap dispenser, wall mounted.
- Push-button operated.
- Robust.
- Suitable for high traffic facilities.
- Model suitable for public use.
- It normally goes along with a warm air hand dryer.

Components and Materials

- Thermoplastic SAN container, 3 mm thick, fumé colour. It is mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs (the lower ones attach the dispenser, whilst the upper ones fix it to the wall) (screws and wall plugs are provided). It can be filled with commercially marketed all purpose liquid and lotion hand soaps and synthetic detergents.
- White ABS top filling lid. To refill, the lid is opened using a standard mediclinics ® key supplied.
- White ABS push-button.
- Anti-dripping and anti-corrosion valve. Design based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness.
- Stainless steel AISI 302 springs.
- Suitable soaps: Hand soaps, with neutral PH, not containing chlorine.

Technical Specifications

Dimensions - 204 x 107x 108 mm
Push-button - ABS
Capacity - 1,1 L
Quantity dispensed per pulsation - 1- 1,2 ml
Operable force - 26 N
Weight (empty dispenser) - 0,3 Kg
Recommended installation height from the self - 15-20 cm


Operation

Press push-button manually to dispense a measured amount of liquid soap. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist.

Certificates & Qualifications

ISO 9001:2008.

Specifications

Wall mounted soap dispenser, robust with a body made of thermoplastic SAN container, 3 mm thick, fumé colour. It should be mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs; the lower ones attach the dispenser, whilst the upper ones fix it to the wall. The push-button and top filling lid should be made of white ABS, and to refill, the lid should be opened using a standard mediclinics ® key supplied. The dispenser should include an anti-dripping and anti-corrosion valve which is based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness. The dispenser should be provided with stainless steel AISI 302 springs. The soap dispenser should be suitable for commercially marketed all purpose liquid and lotion hand soaps and synthetic detergents except for surgical soaps. Overall dimensions shall be 204 x 107 x 108 mm.

Liquid soap dispenser shall be model DJ0010F, fumé san, white ABS, manufactured by Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A

